

FORM PTO-1390
(REV 10-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK

FICE

ATTORNEY'S DOCKET NUMBER

B-4278PCT 619005-7

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

NOT YET ASSIGNED
09/913454

INTERNATIONAL APPLICATION NO.

PCT/GB00/00495

INTERNATIONAL FILING DATE

15 February 2000

PRIORITY DATE CLAIMED

15 February 1999

TITLE OF INVENTION

"PROTECTION OF THE CONFIGURATION OF MODULES IN COMPUTING APPARATUS"

APPLICANT(S) FOR DO/EO/US

(1) Liqun CHEN (2) David CHAN

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
 2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
 3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
 4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
 5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
 6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(3)).
 7. ☒ Amendments to the claims of the International Application under PCT Article 19(35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has **NOT** expired.
 - d. ☒ have not been made and will not be made.
 8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
 9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
 10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Items 11 to 16 below concern document(s) or information included:**
11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
 12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
 13. ☒ A **FIRST** preliminary amendment.
 ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
 14. ☐ A substitute specification.
 15. ☐ A change of power of attorney and/or address letter.
 16. ☒ Other items or information:

copy of Published Title Page of PCT International Application

Declaration/Power of Attorney executed by Liqun CHEN

Declaration/Power of Attorney executed by David CHAN

copy of PCT Request

copy of PCT Demand

copy of International Preliminary Examination Report

Claim to Priority

copy of International Search Report (see Information Disclosure Statement)

EL652176579US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Liqun CHEN, et al.) Re: Preliminary Amendment
U.S. Appln. No.: not yet) Group: not yet assigned
assigned)
U.S. Filing Date: concurrently) Examiner: not yet assigned
herewith)
International Application No:)
PCT/GB00/00495)
International Filing Date:)
15 February 2000) Our Ref.: B-4278PCT 619005-7
For: "PROTECTION OF THE)
CONFIGURATION OF MODULES)
IN COMPUTING APPARATUS") Date: August 14, 2001

Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Attn: United States Designated/Elected Office (DO/EO/US)

Sir:

Prior to examination of the above-identified application, it is respectfully requested that the following amendments be made to the Claims:

IN THE CLAIMS

Please cancel claim 1 without prejudice.

2. (Amended) A method as claimed in claim 4, wherein the stored module configuration is held separately from the computing apparatus.

3. (Amended) A method as claimed in claim 4, wherein the stored module configuration is stored such that it is accessible only by a cryptographic authentication process.

09/913454

Preliminary Amendment
August 14, 2001
Page 2

4. (Amended) A method of protecting from modification computer apparatus comprising a plurality of functional modules, wherein the computer apparatus contains or is in communication with a trusted device adapted to respond to a user in a trusted manner, the method comprising:

storing a module configuration of the computer apparatus;
and

the trusted device checking the actual module configuration against the stored module configuration, and inhibiting function of the computer apparatus if the actual module configuration does not satisfactorily match the stored module configuration.

5. (Amended) A method as claimed in claim 4, wherein the trusted device is adapted to communicate securely with the stored module configuration.

8. (Amended) A method as claimed in claim 4, wherein the step of checking of the actual module configuration comprises a cryptographic identification process for modules with a cryptographic identity.

9. (Amended) A method as claimed in claim 4, wherein a stored module configuration is held by a remote module validation authority.

11. (Amended) A method as claimed in claim 6, wherein a stored module configuration is held by a remote module validation authority and the remote validation authority provides a service allowing a replacement security token to be provided if a security token is lost or stolen.

0913454-081401

Please cancel claim 12 without prejudice.

13. (Amended) Computer apparatus as claimed in claim 14, wherein the stored module configuration is held separately from the computing apparatus and wherein the computer apparatus is adapted to obtain the stored module configuration by a cryptographic authentication process.

14. (Amended) Computer apparatus adapted for protection against modification, the computer apparatus comprising a plurality of modules, one of said modules being a trusted device adapted to respond to a user in a trusted manner, wherein the trusted device is adapted to compare a module configuration of the computer apparatus against a stored module configuration.

16. (Amended) A security token as claimed in claim 15, wherein the stored module configuration is stored in an encrypted form.

17. (Amended) A security token as claimed in claim 15, wherein the security token is a smart card.

18. (Amended) A server having a memory and a communication interface for communicating with a user of remote computer apparatus, said memory having stored therein module configurations of such remote computer apparatus, wherein the service provides through the communication interface a stored module configuration to a user authorized to receive it.

19. (Amended) A server as claimed in claim 18, wherein the server is invoked by the computer apparatus in a step of checking an actual module configuration against the stored module configuration.

0913454-081101

20. (Amended) A server as claimed in claim 19, wherein the step of checking an actual module configuration against the stored module configuration involves a security token, and the server is invoked in the event of loss of the security token.

Please add the following new claims:

22. (New) A method of protecting from modification computer apparatus comprising a plurality of functional modules by monitoring the configuration of functional modules within the computer apparatus, the method comprising:

storing a module configuration of the computer apparatus on
a security token removably attachable to the computer apparatus;
and

checking the actual module configuration against the stored module configuration, and inhibiting function of the computer apparatus if the actual module configuration does not satisfactorily match the stored module configuration.

23. (New) A method as claimed in claim 22, wherein the stored module configuration is stored such that it is accessible only by a cryptographic authentication process.

24. (New) A method as claimed in claim 23, wherein the computer apparatus contains or is in communication with a

trusted device adapted to respond to a user in a trusted manner and the trusted device is adapted to perform the step of checking the actual module configuration against the stored module configuration.

25. (New) A method as claimed in claim 24, wherein the trusted device is adapted to communicate securely with the security token.

26. (New) A method as claimed in claim 22, wherein the security token is a smart card.

27. (New) A method as claimed in claim 22, wherein the stored module configuration is also held by a remote module validation authority.

28. (New) A method as claimed in claim 27, wherein the step of checking the actual module configuration against the stored module configuration involves use of the stored module configuration held by the remote module validation authority.

29. (New) A method as claimed in claim 27, wherein the remote validation authority provides a service allowing a replacement security token to be provided if a security token is lost or stolen.


REMARKS

This Preliminary Amendment cancels claim 1 without prejudice and converts claim 4 from a dependent claim to an independent claim. Claim 4 is slightly broadened by this amendment. The other dependent claims are amended to depend from claim 4 when appropriate and to remove multiple dependencies to reduce official fees. New claims 22-29 have been added after International Preliminary Examination.

This amendment claims claim 12 without prejudice and claim 14 is rewritten in independent format and broadened slightly in the process of rewriting it. The other dependent claims are amended to depend from claim 14 when appropriate.

This Preliminary Amendment amends Claims 3-5, 8-9, 11, 14, and 17 so that these claims are no longer multiply dependent. The Applicants may elect to amend Claims 3-5, 8-9, 11, 14, and 17 to make them again multiply dependent or to add additional claims to this application to provide coverage similar to, broader than, or narrower than the present claims at any time during the pendency of the above-identified U.S. application.

Respectfully submitted,



Richard P. Berg
Reg. No. 28,145
Attorney for Applicant
LADAS & PARRY
5670 Wilshire Boulevard #2100
Los Angeles, California 90036
(323) 934-2300

Enclosure: Appendix A (4 pages)

0913454-081401

Appendix A

(VERSION WITH MARKINGS TO SHOW CHANGES MADE)

Page 1 of 4

Please cancel claim 1 without prejudice.

2. (Amended) A method as claimed in claim [1]4, wherein the stored module configuration is held separately from the computing apparatus.

3. (Amended) A method as claimed in claim [1 or claim 2]4, wherein the stored module configuration is stored such that it is accessible only by a cryptographic authentication process.

4. (Amended) A method [as claimed in any preceding claim] of protecting from modification computer apparatus comprising a plurality of functional modules, wherein the computer apparatus contains or is in communication with a trusted device adapted to respond to a user in a trusted manner, the method comprising:

storing a module configuration of the computer apparatus;
and

the trusted device checking the actual module configuration against the stored module configuration, and inhibiting function of the computer apparatus if the actual module configuration does not satisfactorily match the stored module configuration.

[and wherein the trusted device is adapted to perform the step of checking the actual module configuration against the stored module configuration.]

5. (Amended) A method as claimed in claim 4 [where dependent on claim 2], wherein the trusted device is adapted to communicate securely with the stored module configuration.

Appendix A

(VERSION WITH MARKINGS TO SHOW CHANGES MADE)

Page 2 of 4

8. (Amended) A method as claimed in [any preceding] claim 4, wherein the step of checking of the actual module configuration comprises a cryptographic identification process for modules with a cryptographic identity.

9. (Amended) A method as claimed in [any preceding] claim 4, wherein a stored module configuration is held by a remote module validation authority.

11. (Amended) A method as claimed in [claim 9 or claim 10 where dependent on] claim 6, wherein a stored module configuration is held by a remote module validation authority and the remote validation authority provides a service allowing a replacement security token to be provided if a security token is lost or stolen.

Please cancel claim 12 without prejudice.

13. (Amended) Computer apparatus as claimed in claim [12]¹⁴, wherein the stored module configuration is held separately from the computing apparatus and wherein the computer apparatus is adapted to obtain the stored module configuration by a cryptographic authentication process.

0913454-031401

Appendix A

(VERSION WITH MARKINGS TO SHOW CHANGES MADE)

Page 3 of 4

14. (Amended) Computer apparatus adapted for protection against modification, the computer apparatus comprising a plurality of modules, one of said modules being[as claimed in claim 12 or claim 13, wherein the computer apparatus further comprises] a trusted device adapted to respond to a user in a trusted manner, wherein the trusted device is adapted to compare a module configuration of the computer apparatus against a stored module configuration. [and wherein the trusted device is adapted to perform the step of checking the actual module configuration against the stored module configuration.]

16. (Amended) A security token as claimed in claim 15, wherein the stored module configuration is [held]stored in an encrypted form.

17. (Amended) A security token as claimed in claim 15 [or claim 16], wherein the security token is a smart card.

18. (Amended) A server having a memory and a communication interface for communicating with a user of remote computer apparatus, said memory having stored therein[service for storing] module configurations of such remote computer apparatus [remotely from such computer apparatus], wherein the service provides through the communication interface a stored module configuration to a user [authorised]authorized to receive it.

19. (Amended) A [service]server as claimed in claim 18, wherein the [service]server is invoked by the computer apparatus in a step of checking an actual module configuration against the stored module configuration.

0913454-031401

Appendix A

(VERSION WITH MARKINGS TO SHOW CHANGES MADE)

Page 4 of 4

20. (Amended) A [service]server as claimed in claim 19, wherein the step of checking an actual module configuration against the stored module configuration involves a security token, and the [service]server is invoked in the event of loss of the security token.

21. (Amended) A [service]server as claimed in claim 18, wherein the [service]server is invoked in order to allow modification to the module configuration of computer apparatus.

0013454-081401
TOTAL 4 SHEETS

09/913454

Q/PRTS
1Protection of the Configuration of Modules in Computing ApparatusTechnical Field

This invention relates to the protection of configuration of modules in a computing apparatus.

Background Art

Today, most modules (the word "module" is used here to describe essentially any discrete functional element of a computing platform) used in computing apparatus are standardised and freely interchangeable. This is advantageous, in that it lowers both the assembly cost and repair cost for computer apparatus, but has the disadvantage that it is relatively easy for computer apparatus to be reassembled from stolen modules, or to be counterfeited.

Much consideration has been given to the problem of making theft or counterfeiting of computer apparatus less attractive. Various proposals have been made as to how to render stolen apparatus inoperable. One approach is for computer apparatus to be fitted with a security device (such as a dedicated application specific integrated circuit) which can enable or disable function of the computer apparatus. This security device is adapted to receive signals (by means of a secure communications link) from a remote station, and only enables function of the computer apparatus if a desired signal is detected during an appropriate validation routine. On theft of the apparatus, the owner notifies the remote station, and the signal necessary to allow the security device to enable function of the computer apparatus is no longer broadcast.

This prior art solution is useful to prevent a thief from using stolen apparatus directly, but is of no assistance in preventing assembly of new (possibly counterfeit) apparatus by the thief from stolen modules - this is a significant practical concern. The more general, and probably more important, problem, is protection of the configuration of modules within a computer apparatus, and the prevention of reuse of stolen modules in a new configuration.

Summary of the Invention

Accordingly, in a first aspect the invention provides a method of protecting from modification computer apparatus comprising a plurality of functional modules by

monitoring the configuration of functional modules within the computer apparatus, the method comprising: storing a module configuration of the computer apparatus; and checking the actual module configuration against the stored module configuration, and inhibiting function of the computer apparatus if the actual module configuration does not satisfactorily match the stored module configuration.

Use of stored module configurations in this way allows reuse of modules of computer apparatus to be detected and prevented.

Preferably, the stored module configuration is held separately from the computing apparatus. Whether or not stored separately, it is particularly desirable for the stored module configuration to be stored such that it is accessible only by a cryptographic authentication process.

Of particular interest is the case of a host platform which has, directly or indirectly, the facility to verify the existence and functions of the modules in the platform. The present application is particularly relevant to the case of a computer platform which contains verifiable modules and which is adapted to be "trusted" by a user, in the sense that something can be "trusted" if it always behaves in the expected manner for the intended purpose. It is very desirable to prevent computer platforms of this type from being reassembled by an unauthorised party, particularly from stolen modules.

Should trusted platforms of this type become standard, providing the possibility of checking the module configuration of platforms would make theft of computer apparatus that is a part of such a platform much less attractive.

Advantageously, therefore, the computer apparatus contains or is in communication with a trusted device adapted to respond to a user in a trusted manner, and the trusted device is adapted to perform the step of checking the actual module configuration against the stored module configuration.

Preferably, the trusted device is adapted to communicate securely with the stored module configuration. Advantageously, the stored module configuration is held separately from the computer apparatus in a security token - most advantageously a smart card.

In a second aspect, the invention provides computer apparatus adapted for protection against modification, the computer apparatus comprising a plurality of modules, wherein the computer apparatus is adapted to compare a module configuration of the computer apparatus against a stored module configuration.

In a third aspect, the invention provides a security token adapted to hold a stored module configuration of modules in a computer apparatus, and adapted to

provide the stored module configuration to the computer apparatus to allow comparison between an actual module configuration of the computer apparatus and the stored module configuration.

In a fourth aspect, the invention provides a service for storing module configurations of computer apparatus remotely from such computer apparatus, wherein the service provides a stored module configuration to a user authorised to receive it.

In one advantageous approach, the service is invoked by the computer apparatus in a step of checking an actual module configuration against the stored module configuration. The step of checking an actual module configuration against the stored module configuration may involve a security token, and the service is invoked in the event of loss of the security token. The service may also be invoked in order to allow modification to the module configuration of computer apparatus.

In order to protect configuration of modules in a trusted platform, the use in a cooperative arrangement of the trusted device, a portable security token and the group of modules used in the host platform proves to be particularly effective. Typically, the arrangement implements a security control policy to establish a module configuration profile that lists the registered module group, and to authenticate the modules listed with help of the portable security token.

It is particularly desirable to implement mutual/unilateral authentication and privilege restriction. In particular, preferred embodiments utilise a novel method of binding the identity of the portable security token with varieties of the modules.

In one preferred arrangement, such computer apparatus comprises: memory means storing the instructions of a secure process and an authentication process; processing means arranged to control the operation of the computing apparatus including by executing the secure process and the authentication process as required; user interface means arranged to receive user input and return to the user information generated by the processing means in response to the user input; interface between the computing apparatus and a portable security token means for receiving the token and communicating with the token, the token comprising a body supporting: a token interface for communicating with the interface means; a token processor; and token memory storing token data including information for identifying the token; wherein the processing means is arranged to receive the identity information from the portable token, authenticate the token using the authentication process and, if the token is successfully authenticated, permit a user to interact with the secure process via the user interface means for the purpose of establishing and

modifying a module configuration profile comprising a list of registered modules; type, model, identity and other related information of each module included in the list; and if it is not possible to authenticate the portable token, suspending the interaction between the computing apparatus and the user.

In another preferred arrangement, there is provided a method of controlling computing apparatus to authenticate a module listed in the module configuration profile via an interface between a trusted component and the module means for the trusted component receiving the module and communicating with the module, the module comprising a body supporting: a module interface for communicating with the interface means; module memory storing memory data including information for identifying the module; and the trusted component comprising a body supporting: a component interface for communicating with the above interface means; a component processor; and component memory storing component data including information for identifying the component, wherein the processing means is arranged to receive the identity information from the modules, authenticate the module using the authentication process and, if the module is successfully authenticated, permit a user to interact with the secure process via the user interface means, and if it is not possible to authenticate the module, suspending the interaction between the computing apparatus and the user.

Brief Description of the Drawings

Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, of which:

Figure 1 is a diagram that illustrates a system capable of implementing embodiments of the present invention;

Figure 2 is a diagram which illustrates a motherboard including a trusted device arranged to communicate with a smart card via a smart card reader and with a group of modules;

Figure 3 is a diagram that illustrates the trusted device in more detail;

Figure 4 is a flow diagram which illustrates the steps involved in acquiring an integrity metric of the computing apparatus;

Figure 5 is a flow diagram which illustrates the steps involved in establishing communications between a trusted computing platform and a remote platform including the trusted platform verifying its integrity;

Figure 6 is a flow diagram which illustrates the steps involved in verification of a trusted computing platform by a potential user of that platform by means of a smart card;

Figure 7 is a diagram that illustrates the operational parts of a smart card adapted for use in embodiments of the present invention;

Figure 8 is a flow diagram that illustrates one example for a host platform to authenticate a module with cryptographic identity;

Figure 9 is a flow diagram that illustrates one example for the host platform to authenticate a module with serial number identity;

Figure 10 is a flow diagram that illustrates one example for the host platform to verify the authorisation of a module without distinguishable identity.

Description of the Preferred Embodiment

The present invention is generally relevant to the prevention of reconfiguration of computer apparatus by an unauthorised user. The embodiments described relate to a particularly preferred case, in which the computer apparatus is a "trusted" platform (one that is designed always to behave in an expected manner for an intended purpose).

For the purpose of preventing unauthorised reconfiguration, each computer apparatus has a module configuration profile. The profile includes a list of registered modules. The attributes of each module listed in the profile may include type, model, manufacturer, statistically unique identity if there exists one, usage privilege and other related information.

This module configuration profile can be held in a number of different ways, as will be discussed further below. However, in particularly preferred embodiments of the invention the module configuration profile is held on a security token such as smart card. Such a smart card is here termed an MCA (Module Configuration Authority) smart card, or "MCA smart card". The MCA smart card is adapted to communicate in a secure manner with a trusted device within the trusted platform. The trusted device and the MCA smart card (or other security token) could be a secure pair with a trusted relationship based on strong authentication between each other.

By transferring the module configuration profile to the trusted device, the security token introduces each module listed in the profile to the trusted device, which is then able to authenticate those modules. It is strongly desirable that both the

security token and the trusted device have the function of tamper-resistant storage to store the module configuration profile.

After a reset of the trusted computing platform, the trusted device checks whether every module present in the platform is listed in the module configuration profile. For the sake of simplicity of description, only three types of modules are considered in any detail herein:

- A module which has a cryptographic identity, that is, one for which the process of authentication requires at least one private key for some cryptographic functions, such as signature and/or decryption. This module can be authenticated by the trusted device without further direct interaction with the MCA smart card. Examples of this type of module include a smart card with cryptographic functions, a cryptographic coprocessor, and a hard disk drive with security functions.
- A module which has a built-in serial number as an identity, which is at least statistically unique and is stored inside the module in a tamper-resistant fashion. This module may or may not be able to be authenticated by the trusted device without direct interaction with the MCA smart card. Examples of this type of module include a smart card with secure storage function, a network card, and an Intel Pentium III processor.
- A module which has no distinguishable identity. Such a module is freely interchangeable and the authorisation of the module can be ensured with direct interaction with the MCA smart card. For example, when the trusted device meets a module without a distinguishable identity, the device will ask for presentation of the MCA smart card to confirm a valid authorisation of the module.

The elements and the operation of a trusted platform (containing a trusted device used in the operations indicated above) will now be described. After that, a smart card appropriate for use as an MCA smart card (in conjunction with a trusted platform as here described) will also be described. The process of authorisation for each of the three types of module described above will then be described also.

The embodiment of a trusted platform here described has as its central feature the incorporation into a computing platform of a physical trusted device whose function is to bind the identity of the platform to reliably measured data that provides an integrity metric of the platform. The identity and the integrity metric are

compared with expected values provided by a trusted party (TP) that is prepared to vouch for the trustworthiness of the platform. If there is a match, the implication is that at least part of the platform is operating correctly, depending on the scope of the integrity metric.

A user verifies the correct operation of the platform before exchanging other data with the platform. A user does this by requesting the trusted device to provide its identity and an integrity metric. (Optionally the trusted device will refuse to provide evidence of identity if it itself was unable to verify correct operation of the platform.) The user receives the proof of identity and the identity metric, and compares them against values which it believes to be true. Those proper values are provided by the TP or another entity that is trusted by the user. If data reported by the trusted device is the same as that provided by the TP, the user trusts the platform. This is because the user trusts the entity. The entity trusts the platform because it has previously validated the identity and determined the proper integrity metric of the platform.

Once a user has established trusted operation of the platform, he exchanges other data with the platform. For a local user, the exchange might be by interacting with some software application running on the platform. For a remote user, the exchange might involve a secure transaction. In either case, the data exchanged is 'signed' by the trusted device. The user can then have greater confidence that data is being exchanged with a platform whose behaviour can be trusted.

The trusted device uses cryptographic processes but does not necessarily provide an external interface to those cryptographic processes. Also, a most desirable implementation would be to make the trusted device tamperproof, to protect secrets by making them inaccessible to other platform functions and provide an environment that is substantially immune to unauthorised modification. Since tamper-proofing is impossible, the best approximation is a trusted device that is tamper-resistant, or tamper-detecting. The trusted device, therefore, preferably consists of one physical component that is tamper-resistant.

Techniques relevant to tamper-resistance are well known to those skilled in the art of security. These techniques include methods for resisting tampering (such as appropriate encapsulation of the trusted device), methods for detecting tampering (such as detection of out of specification voltages, X-rays, or loss of physical integrity in the trusted device casing), and methods for eliminating data when tampering is detected. Further discussion of appropriate techniques can be found at <http://www.cl.cam.ac.uk/~mgk25/tamper.html>. It will be appreciated that, although tamper-proofing is a most desirable feature of the present invention, it does not enter

into the normal operation of the invention and, as such, is beyond the scope of the present invention and will not be described in any detail herein.

The trusted device is preferably a physical one because it must be difficult to forge. It is most preferably tamper-resistant because it must be hard to counterfeit. It typically has an engine capable of using cryptographic processes because it is required to prove identity, both locally and at a distance, and it contains at least one method of measuring some integrity metric of the platform with which it is associated.

A trusted platform 10 is illustrated in the diagram in Figure 1. The platform 10 includes the standard features of a keyboard 14, mouse 16 and visual display unit (VDU) 18, which provide the physical 'user interface' of the platform. This embodiment of a trusted platform also contains a smart card reader 12 - a smart card reader is not an essential element of all trusted platforms, but is employed in various preferred embodiments described below. Along side the smart card reader 12, there is illustrated a smart card 19 to allow trusted user interaction with the trusted platform as shall be described further below. In the platform 10, there are a plurality of modules 15: these are other functional elements of the trusted platform of essentially any kind appropriate to that platform (the functional significance of such elements is not relevant to the present invention and will not be discussed further herein).

As illustrated in Figure 2, the motherboard 20 of the trusted computing platform 10 includes (among other standard components) a main processor 21, main memory 22, a trusted device 24, a data bus 26 and respective control lines 27 and lines 28, BIOS memory 29 containing the BIOS program for the platform 10 and an Input/Output (IO) device 23, which controls interaction between the components of the motherboard and the smart card reader 12, the keyboard 14, the mouse 16 and the VDU 18. The main memory 22 is typically random access memory (RAM). In operation, the platform 10 loads the operating system, for example Windows NT™, into RAM from hard disk (not shown). Additionally, in operation, the platform 10 loads the processes or applications that may be executed by the platform 10 into RAM from hard disk (not shown).

Typically, in a personal computer the BIOS program is located in a special reserved memory area, the upper 64K of the first megabyte of the system memory (addresses F000h to FFFFh), and the main processor is arranged to look at this memory location first, in accordance with an industry wide standard.

The significant difference between the platform and a conventional platform is that, after reset, the main processor is initially controlled by the trusted device, which then hands control over to the platform-specific BIOS program, which in turn

initialises all input/output devices as normal. After the BIOS program has executed, control is handed over as normal by the BIOS program to an operating system program, such as Windows NT (TM), which is typically loaded into main memory 22 from a hard disk drive (not shown).

Clearly, this change from the normal procedure requires a modification to the implementation of the industry standard, whereby the main processor 21 is directed to address the trusted device 24 to receive its first instructions. This change may be made simply by hard-coding a different address into the main processor 21. Alternatively, the trusted device 24 may be assigned the standard BIOS program address, in which case there is no need to modify the main processor configuration.

It is highly desirable for the BIOS boot block to be contained within the trusted device 24. This prevents subversion of the obtaining of the integrity metric (which could otherwise occur if rogue software processes are present) and prevents rogue software processes creating a situation in which the BIOS (even if correct) fails to build the proper environment for the operating system.

Although, in the preferred embodiment to be described, the trusted device 24 is a single, discrete component, it is envisaged that the functions of the trusted device 24 may alternatively be split into multiple devices on the motherboard, or even integrated into one or more of the existing standard devices of the platform. For example, it is feasible to integrate one or more of the functions of the trusted device into the main processor itself, provided that the functions and their communications cannot be subverted. This, however, would probably require separate leads on the processor for sole use by the trusted functions. Additionally or alternatively, although in the present embodiment the trusted device is a hardware device that is adapted for integration into the motherboard 20, it is anticipated that a trusted device may be implemented as a 'removable' device, such as a dongle, which could be attached to a platform when required. Whether the trusted device is integrated or removable is a matter of design choice. However, where the trusted device is separable, a mechanism for providing a logical binding between the trusted device and the platform should be present.

The trusted device 24 comprises a number of blocks, as illustrated in Figure 3. After system reset, the trusted device 24 performs a secure boot process to ensure that the operating system of the platform 10 (including the system clock and the display on the monitor) is running properly and in a secure manner. During the secure boot process, the trusted device 24 acquires an integrity metric of the computing platform 10. The trusted device 24 can also perform secure data transfer

and, for example, authentication between it and a smart card via encryption/decryption and signature/verification. The trusted device 24 can also securely enforce various security control policies, such as locking of the user interface.

Specifically, the trusted device comprises: a controller 30 programmed to control the overall operation of the trusted device 24, and interact with the other functions on the trusted device 24 and with the other devices on the motherboard 20; a measurement function 31 for acquiring the integrity metric from the platform 10; a cryptographic function 32 for signing, encrypting or decrypting specified data; an authentication function 33 for authenticating a smart card; and interface circuitry 34 having appropriate ports (36, 37 & 38) for connecting the trusted device 24 respectively to the data bus 26, control lines 27 and address lines 28 of the motherboard 20. Each of the blocks in the trusted device 24 has access (typically via the controller 30) to appropriate volatile memory areas 4 and/or non-volatile memory areas 3 of the trusted device 24. Additionally, the trusted device 24 is designed, in a known manner, to be tamper resistant.

For reasons of performance, the trusted device 24 may be implemented as an application specific integrated circuit (ASIC). However, for flexibility, the trusted device 24 is preferably an appropriately programmed micro-controller. Both ASICs and micro-controllers are well known in the art of microelectronics and will not be considered herein in any further detail.

One item of data stored in the non-volatile memory 3 of the trusted device 24 is a certificate 350. The certificate 350 contains at least a public key 351 of the trusted device 24 and an authenticated value 352 of the platform integrity metric measured by a trusted party (TP). The certificate 350 is signed by the TP using the TP's private key prior to it being stored in the trusted device 24. In later communications sessions, a user of the platform 10 can verify the integrity of the platform 10 by comparing the acquired integrity metric with the authentic integrity metric 352. If there is a match, the user can be confident that the platform 10 has not been subverted. Knowledge of the TP's generally-available public key enables simple verification of the certificate 350. The non-volatile memory 35 also contains an identity (ID) label 353. The ID label 353 is a conventional ID label, for example a serial number, that is unique within some context. The ID label 353 is generally used for indexing and labelling of data relevant to the trusted device 24, but is insufficient in itself to prove the identity of the platform 10 under trusted conditions.

In the event the trusted device 24 is not the first accessed, there is of course a chance that the trusted device 24 will not be accessed at all. This would be the case, for example, if the main processor 21 were manipulated to run the BIOS program first. Under these circumstances, the platform would operate, but would be unable to verify its integrity on demand, since the integrity metric would not be

available. Further, if the trusted device 24 were accessed after the BIOS program had been accessed, the Boolean value would clearly indicate lack of integrity of the platform.

In step 520, when (or if) accessed as a memory by the main processor 21, the main processor 21 reads the stored native hash instructions 354 from the measurement function 31 in step 525. The hash instructions 354 are passed for processing by the main processor 21 over the data bus 26. In step 530, main processor 21 executes the hash instructions 354 and uses them, in step 535, to compute a digest of the BIOS memory 29, by reading the contents of the BIOS memory 29 and processing those contents according to the hash program. In step 540, the main processor 21 writes the computed digest 361 to the appropriate non-volatile memory location 4 in the trusted device 24. The measurement function 31, in step 545, then calls the BIOS program in the BIOS memory 29, and execution continues in a conventional manner.

Clearly, there are a number of different ways in which the integrity metric may be calculated, depending upon the scope of the trust required. The measurement of the BIOS program's integrity provides a fundamental check on the integrity of a platform's underlying processing environment. The integrity metric should be of such a form that it will enable reasoning about the validity of the boot process - the value of the integrity metric can be used to verify whether the platform booted using the correct BIOS. Optionally, individual functional blocks within the BIOS could have their own digest values, with an ensemble BIOS digest being a digest of these individual digests. This enables a policy to state which parts of BIOS operation are critical for an intended purpose, and which are irrelevant (in which case the individual digests must be stored in such a manner that validity of operation under the policy can be established).

Other integrity checks could involve establishing that various other devices, components or apparatus attached to the platform are present and in correct working order. In one example, the BIOS programs associated with a SCSI controller could be verified to ensure communications with peripheral equipment could be trusted. In another example, the integrity of other devices, for example memory devices or co-processors, on the platform could be verified by enacting fixed challenge/response interactions to ensure consistent results - this checking of the configuration of the platform is the domain of the present invention, and is discussed further below with reference to Figures 8 to 10. Where the trusted device 24 is a separable component, some such form of interaction is desirable to provide an appropriate logical binding

between the trusted device 14 and the platform. Also, although in the present embodiment the trusted device 24 utilises the data bus as its main means of communication with other parts of the platform, it would be feasible, although not so convenient, to provide alternative communications paths, such as hard-wired paths or optical paths. Further, although in the present embodiment the trusted device 24 instructs the main processor 21 to calculate the integrity metric in other embodiments, the trusted device itself is arranged to measure one or more integrity metrics.

Preferably, the BIOS boot process includes mechanisms to verify the integrity of the boot process itself. Such mechanisms are already known from, for example, Intel's draft "Wired for Management baseline specification v 2.0 - BOOT Integrity Service", and involve calculating digests of software or firmware before loading that software or firmware. Such a computed digest is compared with a value stored in a certificate provided by a trusted entity, whose public key is known to the BIOS. The software/firmware is then loaded only if the computed value matches the expected value from the certificate, and the certificate has been proven valid by use of the trusted entity's public key. Otherwise, an appropriate exception handling routine is invoked.

Optionally, after receiving the computed BIOS digest, the trusted device 24 may inspect the proper value of the BIOS digest in the certificate and not pass control to the BIOS if the computed digest does not match the proper value. Additionally, or alternatively, the trusted device 24 may inspect the Boolean value and not pass control back to the BIOS if the trusted device 24 was not the first memory accessed. In either of these cases, an appropriate exception handling routine may be invoked.

Figure 5 illustrates the flow of actions by a TP, the trusted device 24 incorporated into a platform, and a user (of a remote platform) who wants to verify the integrity of the trusted platform. It will be appreciated that substantially the same steps as are depicted in Figure 5 are involved when the user is a local user. In either case, the user would typically rely on some form of software application to enact the verification. It would be possible to run the software application on the remote platform or the trusted platform. However, there is a chance that, even on the remote platform, the software application could be subverted in some way. Therefore, it is anticipated that, for a high level of integrity, the software application would reside on a smart card of the user, who would insert the smart card into an appropriate reader for the purposes of verification. Figure 5 illustrates the flow of actions for the general

case - a more specific flow of actions for verification by a user smart card will be described with reference to Figure 6 further below.

At the first instance, a TP, which vouches for trusted platforms, will inspect the type of the platform to decide whether to vouch for it or not. This will be a matter of policy. If all is well, in step 600, the TP measures the value of integrity metric of the platform. Then, the TP generates a certificate, in step 605, for the platform. The certificate is generated by the TP by appending the trusted device's public key, and optionally its ID label, to the measured integrity metric, and signing the string with the TP's private key.

The trusted device 24 can subsequently prove its identity by using its private key to process some input data received from the user and produce output data, such that the input/output pair is statistically impossible to produce without knowledge of the private key. Hence, knowledge of the private key forms the basis of identity in this case. Clearly, it would be feasible to use symmetric encryption to form the basis of identity. However, the disadvantage of using symmetric encryption is that the user would need to share his secret with the trusted device. Further, as a result of the need to share the secret with the user, while symmetric encryption would in principle be sufficient to prove identity to the user, it would insufficient to prove identity to a third party, who could not be entirely sure the verification originated from the trusted device or the user.

In step 610, the trusted device 24 is initialised by writing the certificate 350 into the appropriate non-volatile memory locations 3 of the trusted device 24. This is done, preferably, by secure communication with the trusted device 24 after it is installed in the motherboard 20. The method of writing the certificate to the trusted device 24 is analogous to the method used to initialise smart cards by writing private keys thereto. The secure communications is supported by a 'master key', known only to the TP, that is written to the trusted device (or smart card) during manufacture, and used to enable the writing of data to the trusted device 24; writing of data to the trusted device 24 without knowledge of the master key is not possible.

At some later point during operation of the platform, for example when it is switched on or reset, in step 615, the trusted device 24 acquires and stores the integrity metric 361 of the platform.

When a user wishes to communicate with the platform, in step 620, he creates a nonce, such as a random number, and, in step 625, challenges the trusted device 24 (the operating system of the platform, or an appropriate software application, is arranged to recognise the challenge and pass it to the trusted device

24, typically via a BIOS-type call, in an appropriate fashion). The nonce is used to protect the user from deception caused by replay of old but genuine signatures (called a 'replay attack') by untrustworthy platforms. The process of providing a nonce and verifying the response is an example of the well-known 'challenge/response' process.

In step 630, the trusted device 24 receives the challenge and creates an appropriate response. This may be a digest of the measured integrity metric and the nonce, and optionally its ID label. Then, in step 635, the trusted device 24 signs the digest, using its private key, and returns the signed digest, accompanied by the certificate 350, to the user.

In step 640, the user receives the challenge response and verifies the certificate using the well known public key of the TP. The user then, in step 650, extracts the trusted device's 24 public key from the certificate and uses it to decrypt the signed digest from the challenge response. Then, in step 660, the user verifies the nonce inside the challenge response. Next, in step 670, the user compares the computed integrity metric, which it extracts from the challenge response, with the proper platform integrity metric, which it extracts from the certificate. If any of the foregoing verification steps fails, in steps 645, 655, 665 or 675, the whole process ends in step 680 with no further communications taking place.

Assuming all is well, in steps 685 and 690, the user and the trusted platform use other protocols to set up secure communications for other data, where the data from the platform is preferably signed by the trusted device 24.

Further refinements of this verification process are possible. It is desirable that the challenger becomes aware, through the challenge, both of the value of the platform integrity metric and also of the method by which it was obtained. Both these pieces of information are desirable to allow the challenger to make a proper decision about the integrity of the platform. The challenger also has many different options available - it may accept that the integrity metric is recognised as valid in the trusted device 24, or may alternatively only accept that the platform has the relevant level of integrity if the value of the integrity metric is equal to a value held by the challenger (or may hold there to be different levels of trust in these two cases).

The techniques of signing, using certificates, and challenge/response, and using them to prove identity, are well known to those skilled in the art of security and therefore need not be described in any more detail herein.

As indicated above, Figure 6 shows the flow of actions in an example of verification of platform integrity by a user interacting with the trusted platform with a

Initially, the user inserts their smart card 19 into the smart card reader 12 of the platform in step 700.

When the smart card 19 is inserted into the smart card reader 12, the trusted device 24 is triggered to attempt mutual authentication in step by generating and transmitting a nonce A to the smart card 19 in step 705. A nonce, such as a random number, is used to protect the originator from deception caused by replay of old but genuine responses (called a "replay attack") by untrustworthy third parties.

The trusted device 24 authenticates the response by using the public key in the certificate to verify the signature of the plain text in step 715. If the response is not authentic, the process ends in step 720. If the response is authentic, in step 725 the trusted device 24 generates and sends a further response including the concatenation of: the plain text of the nonce A, the nonce B, an ID of the smart card 19 and the acquired integrity metric; the signature of the plain text, generated by signing the plain text using the private key of the trusted device 24; and the certificate

comprising the public key of the trusted device 24 and the authentic integrity metric, both signed by the private key of the TP.

The smart card 19 authenticates this response by using the public key of the TP and comparing the acquired integrity metric with the authentic integrity metric, where a match indicates successful verification, in step 730. If the further response is not authentic, the process ends in step 735.

If the procedure is successful, both the trusted device 24 has authenticated the logon card 19 and the smart card 19 has verified the integrity of the trusted platform and, in step 740, the authentication process executes the secure process for the user.

In certain types of interaction, the authentication process can end at this point. However, if a session is to be continued between the user and the trusted platform, it is desirable to ensure that the user remains authenticated to the platform.

Where continued authentication is required, the authentication process sets an interval timer in step 745. Thereafter, using appropriate operating system interrupt routines, the authentication process services the interval timer periodically to detect when the timer meets or exceeds a pre-determined timeout period in step 750.

Clearly, the authentication process and the interval timer run in parallel with the secure process. When the timeout period is met or exceeded, the authentication process triggers the trusted device 24 to re-authenticate the smart card 19, by transmitting a challenge for the smart card 19 to identify itself in step 760. The smart card 19 returns a certificate including its ID and its public key in step 765. In step 770, if there is no response (for example, as a result of the smart card 19 having been removed) or the certificate is no longer valid for some reason (for example, the smart card has been replaced with a different smart card), the session is terminated by the trusted device 24 in step 775. Otherwise, in step 770, the process from step 745 repeats by resetting the interval timer.

Additionally, or alternatively, in some embodiments it may be required that the user profile is encrypted and signed to protect privacy and integrity. If so, a secure data transfer protocol may be needed between the trusted device 24 and the smart card 19. There exist many available mechanisms for transferring secure credentials between two entities. A possible implementation, which may be used in the present embodiment, is secure key transport mechanisms from ISO/IEC DIS 11770-3, "Information technology - Security techniques - Key management - Part 3: Mechanisms using asymmetric techniques", International Organization for Standardization, March 1997.

00913454-081401

The 'security policy' 424 dictates the options that a user has on the platform 10 while verifying a module 15. For example, the user interface may be locked or unlocked while a module 15 is authenticated, depending on the function of the module 15. Additionally, or alternatively, certain files or executable programs on the platform 10 may be made accessible or inaccessible, depending on the level of trust

for a particular module 15. Moreover, if authentication for a module 15 fails, the user interface may be locked, in which event it cannot be accessed by the user at all, or the user interface may be left unlocked, but in a state such that the functions associated with this unauthorised module are not available for the user.

A 'trust structure' 425 defines whether a module 15 can itself 'introduce' further modules 15 into the system without first requiring authorisation from the MCA smart card 19. In the embodiments described in detail herein, the only defined trust structure is between the MCA smart card 19 and the modules 15 that can be introduced to the platform 10 by the MCA smart card 19. Allowing specified modules 15 to introduce further modules would preferably require such a module 15 to have an equivalent of a module configuration profile listing the or each module that it is able to introduce. To prevent misuse, it is desirable for such a module must be removable, and to be stored apart from the host platform.

As indicated above, authentication between an MCA smart card 19 and the platform can be achieved by the process set out in Figure 6 above. It will typically not be necessary for the reauthorisation loop to be used, as module configuration authorisation will typically not need to be carried out repeatedly throughout a user session.

When authentication is achieved, the trusted device 24 then interrogates all the modules 15 in the computer apparatus to be validated (typically, but not necessarily, the trusted platform 10 itself). Authentication of different types of module is discussed further below. The trusted device 24 thus obtains an actual module configuration profile - this is compared with the stored module configuration profile on the MCA smart card 19. The result of this comparison is treated in accordance with the security policy 424, with results ranging from uninhibited use of the computer apparatus by the user in the case of a total match, to inhibited or no use of the computer apparatus in the case of a less than total match.

In one possible arrangement, the trusted device 24 and the MCA smart card 19 may be a specific pair, whereby a user is not able to use one smart card to authorise more than one platform and/or a platform cannot be authorised by using more than one smart card. Clearly, this is not the only possibility. Alternatively, one smart card may be adapted to function for more than one platform and/or one platform can be authorised by using more than one smart card.

It may be desirable to ensure that there is a recovery service for MCA smart cards. If such a recovery service exists, if one smart card is lost, the owner of the corresponding platform can ask the recovery service to change the authority

relationship from the lost MCA smart card to another MCA smart card. Clearly, the recovery service must exercise great care in making this change, and a high level of trust between the recovery service and each trusted platform concerned is required.

Processes for authenticating the different module types (cryptographic identity, serial number identity, and no self-identity) will now be described.

A preferred process for authenticating a cryptographic identity module 15 by a platform 10 will be described with reference to the flow diagram in Figure 8. As will be described, the process conveniently implements a challenge/response routine. Again, there exist many available challenge/response mechanisms. The implementation of an authentication protocol used in the present embodiment is unilateral authentication with 2-pass, as described in ISO/IEC 9798-3. Of course, there is no reason why other authentication procedures cannot be used, for example 1-pass, as also described in ISO/IEC 9798-3.

Initially in step 800, the trusted device 24 retrieves a module configuration profile listing the identity information of the module, which may be a certificate of a public key corresponding with the module's private key. It is assumed that the trusted device 24 can verify the validation of the certificate of the module's public key. It then challenges the module by sending a nonce in step 805. After receiving the nonce, in step 810, the MCA smart card 19 generates and returns a response comprising the concatenation of: the plain text of the nonce, the ID 353 of the trusted device 24 and some redundancy; the signature of the plain text, generated by signing the plain text with the private key of the MCA smart card 19; and a certificate containing the ID and the public key of the MCA smart card 19.

The trusted device 24 authenticates the response by using the public key in the certificate to verify the signature of the plain text in step 815. If the response is not authentic, the process ends in step 820. If the response is authentic, in step 830, the authentication process executes some secure processes between the trusted device 24 and the MCA smart card 19.

A preferred process for authenticating a serial number identity module 15 by a platform 10 will be described with reference to the flow diagram in Figure 9. The trusted device 24 needs to check if the serial number and other related information of the module match with the data about this module listed in the module configuration profile. If the trusted device 24 is unable to obtain the serial number of a module in a sufficiently secure manner, then it will not be advisable to follow this approach (the

approach shown in Figure 10, in which the MCA smart card 19 plays a positive role, is required).

Initially, the trusted device 24 retrieves a module configuration profile listing the identity information of the module in step 900, then it requests the serial number of the module in step 905. The module 15 returns the response with its serial number in step 910. The trusted device 24 compares this serial number with the data recorded in the module configuration profile in step 915. If it matches, the authentication passes and the following secure process will carry on in step 930; otherwise, the authentication is failed in step 920.

A preferred process for verifying authorisation of a module without self-identity 15 by a platform 10 will be described with reference to the flow diagram in Figure 10. The authorisation of usage of the module can be ensured with on-line help of the MCA smart card.

Initially, the trusted device 24 retrieves a module configuration profile listing the identity information of the module in step 1000. When the trusted device 24 meets a module 15 without a distinguishable identity, the trusted device 24 will ask for presentation of the MCA smart card 19 to confirm a valid authorisation of the module. To do so, the trusted device first displays a message to request an MCA smart card 19 in step 1025, and second locks the user interface in step 1030. The user inserts the MCA smart card 19 in step 1033. Authentication between the trusted device 24 and the MCA smart card 19 can choose either unilateral authentication or mutual authentication as shown above. In Figure 8, we use a unilateral authentication with 2-pass, as described in ISO/IEC 9798-3. The trusted device 24 challenges the MCA smart card 19 in step 1040, and the MCA smart card 19 responds in step 845. The trusted device 24 authenticates the response in step 1050. If the response is not authentic, the process aborts in step 1055. If the response is authentic, the trusted device accepts the corresponding module, and the following secure process will carry on in step 1060.

If, during the process of authentication of modules, a module is not successfully authenticated, an appropriate measure may be taken in accordance with the security policy 424, such as locking of the user interface. If the authentication procedure fails for any other reason, such as removal of the MCA smart card, the user interface may be temporarily locked - if the user inserts the MCA smart card 19, a new round of authentication is performed between the MCA smart card 19 and the platform 10. Upon successful verification, the user interface will be unlocked.

It is clear that where a trusted computing platform 10 has an associated MCA smart card 19, the MCA smart card 19 should be kept safely and preferably remotely from the platform 10. It is desirable for the MCA smart card 19 to be provided with appropriate security protection, such as a user password, to ensure that it is only used in an authorised manner.

Although in the embodiment described above, the module configuration is stored in a local smart card, other possibilities of providing module configuration in accordance with the invention are available. The module configuration may be provided by a remote smart card, communicating with the trusted platform by an appropriate communication system (most conveniently, by the Internet, though essentially any other communication networks suitable for carrying the relevant amount of data could be suitable). Appropriate secure communication between the remote smart card and the trusted platform 10 can be established by conventional means (essentially as indicated above for communication between a local smart card 19 and the trusted platform 10), although a greater level of encryption may be required. The module configuration may be held with another form of security token (other than a smart card), either locally or remotely.

A further possibility is for the module configuration information to be held on a remote server. Clearly, there will need to be an appropriate trust relationship between the remote server and the trusted platform, together with an appropriate communication path (typically the Internet) and, preferably, secure communication - otherwise the relationship and interactions between the remote server and the trusted platform may be essentially the same as between the MCA smart card and the trusted platform as described above, and the skilled person. There is thus the possibility of having a module configuration authorisation server holding a large number of module configurations, and providing module configuration authorisation as a service.

A further alternative is to have a remote module configuration authorisation (MCA) server as an addition, rather than an alternative, to an MCA smart card. An owner of a computer apparatus could be offered the alternative of using an MCA smart card, an MCA server, or both (requiring the trusted device to communicate with both the MCA smart card and the MCA server for either proper function or reconfiguration). An advantage of requiring MCA server authorisation for function of the computer apparatus is that if both the computer apparatus and the MCA smart card have been stolen, then the owner can notify the operator of the MCA server and the MCA server will no longer authorise operation of the computer apparatus.

Clearly, it is necessary for there to be a mechanism to allow module configurations to be established and modified. Establishment could take place in an initialisation routine after assembly of the trusted platform 10 (in which, for example, the trusted device 24 in communication with MCA smart card 19 interrogates all modules 15 in the trusted platform 10 to establish their identities and records the results to the MCA smart card 19 in a manner comparable to that in which the initial value of the integrity metric is established and stored). Modification may then be allowed by an appropriate user routine when communication with the MCA smart card 19 is subsequently established - for example, when module configuration changes are detected, the user may be requested to authorise such changes (preferably after invocation of an appropriate security mechanism to establish that the user is authorised, such as a password). Where an MCA server and an MCA smart card 19 both exist, a practical arrangement may be to allow routine validation with the MCA smart card 19 alone but only to allow module configuration changes with the cooperation of the MCA server (the opposite arrangement may also be advantageous in some systems - allowing routing validation with an MCA server but configuration changes only with the MCA smart card 19).

Although the embodiments described above use a trusted platform having a trusted device, this arrangement is highly advantageous rather than essential to operation of the invention. An appropriate mechanism is required for checking the modules in the computer apparatus against a securely held module configuration, and also for inhibiting function of the computer apparatus (in according with an appropriate security policy), but these could be achieved by means other than a trusted device as described in the preferred embodiments - for example, by appropriate software in the computer apparatus (although this solution is likely to be less secure than would be the case with use of a trusted device). However, for computer apparatus other than a general purpose computing platform, use of software or another solution (such as a dedicated ASIC) may be a satisfactory solution.

Claims

1. A method of protecting from modification computer apparatus comprising a plurality of functional modules by monitoring the configuration of functional modules within the computer apparatus, the method comprising:

storing a module configuration of the computer apparatus; and

checking the actual module configuration against the stored module configuration, and inhibiting function of the computer apparatus if the actual module configuration does not satisfactorily match the stored module configuration.
2. A method as claimed in claim 1, wherein the stored module configuration is held separately from the computing apparatus.
3. A method as claimed in claim 1 or claim 2, wherein the stored module configuration is stored such that it is accessible only by a cryptographic authentication process.
4. A method as claimed in any preceding claim, wherein the computer apparatus contains or is in communication with a trusted device adapted to respond to a user in a trusted manner, and wherein the trusted device is adapted to perform the step of checking the actual module configuration against the stored module configuration.
5. A method as claimed in claim 4 where dependent on claim 2, wherein the trusted device is adapted to communicate securely with the stored module configuration.
6. A method as claimed in claim 5, wherein the stored module configuration is stored in a security token.
7. A method as claimed in claim 6, wherein the security token is a smart card.

8. A method as claimed in any preceding claim, wherein the step of checking of the actual module configuration comprises a cryptographic identification process for modules with a cryptographic identity.
9. A method as claimed in any preceding claim, wherein a stored module configuration is held by a remote module validation authority.
10. A method as claimed in claim 9, wherein the step of checking the actual module configuration against the stored module configuration involves use of the stored module configuration held by the remote module validation authority.
11. A method as claimed in claim 9 or claim 10 where dependent on claim 6, wherein the remote validation authority provides a service allowing a replacement security token to be provided if a security token is lost or stolen.
12. Computer apparatus adapted for protection against modification, the computer apparatus comprising a plurality of modules, wherein the computer apparatus is adapted to compare a module configuration of the computer apparatus against a stored module configuration.
13. Computer apparatus as claimed in claim 12, wherein the stored module configuration is held separately from the computing apparatus and wherein the computer apparatus is adapted to obtain the stored module configuration by a cryptographic authentication process.
14. Computer apparatus as claimed in claim 12 or claim 13, wherein the computer apparatus further comprises a trusted device adapted to respond to a user in a trusted manner, and wherein the trusted device is adapted to perform the step of checking the actual module configuration against the stored module configuration.
15. A security token adapted to hold a stored module configuration of modules in a computer apparatus, and adapted to provide the stored module configuration to the computer apparatus to allow comparison between an

actual module configuration of the computer apparatus and the stored module configuration.

16. A security token as claimed in claim 15, wherein the stored module configuration is held in an encrypted form.
17. A security token as claimed in claim 15 or claim 16, wherein the security token is a smart card.
18. A service for storing module configurations of computer apparatus remotely from such computer apparatus, wherein the service provides a stored module configuration to a user authorised to receive it.
19. A service as claimed in claim 18, wherein the service is invoked by the computer apparatus in a step of checking an actual module configuration against the stored module configuration.
20. A service as claimed in claim 19, wherein the step of checking an actual module configuration against the stored module configuration involves a security token, and the service is invoked in the event of loss of the security token.
21. A service as claimed in claim 18, wherein the service is invoked in order to allow modification to the module configuration of computer apparatus.

27
ABSTRACT

Protection of the Configuration of Modules in Computing Apparatus

A method of protecting from modification computer apparatus comprising a plurality of functional modules by monitoring the configuration of functional modules within the computer apparatus. The method comprises: storing a module configuration of the computer apparatus; and checking the actual module configuration against the stored module configuration, and inhibiting function of the computer apparatus if the actual module configuration does not satisfactorily match the stored module configuration. Advantageously, the module configuration is stored on a security token, such as a smart card.

Figure 7

2007-01-04 14:00:00

1/9

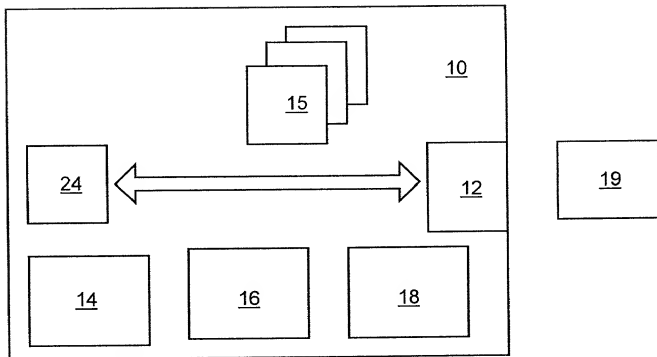


FIGURE 1



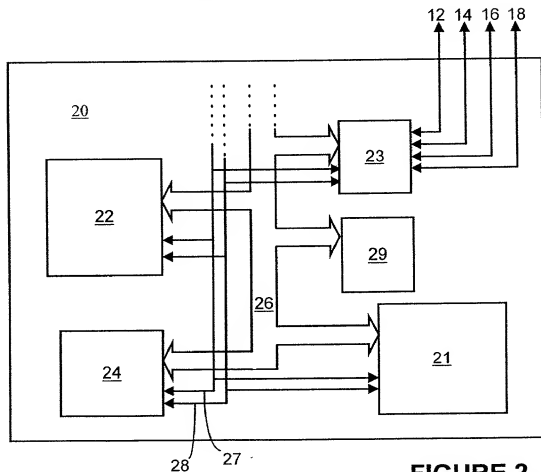


FIGURE 2

FIGURE 1

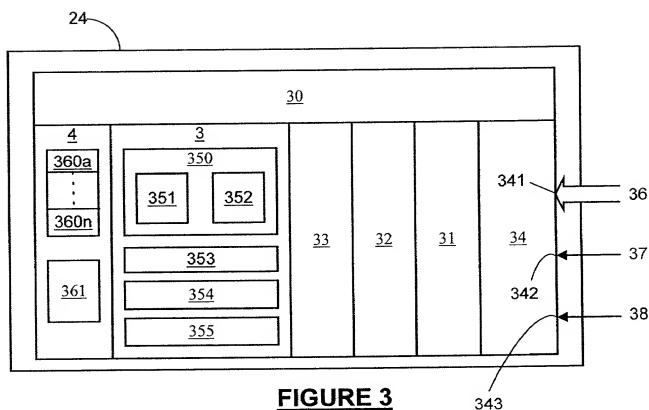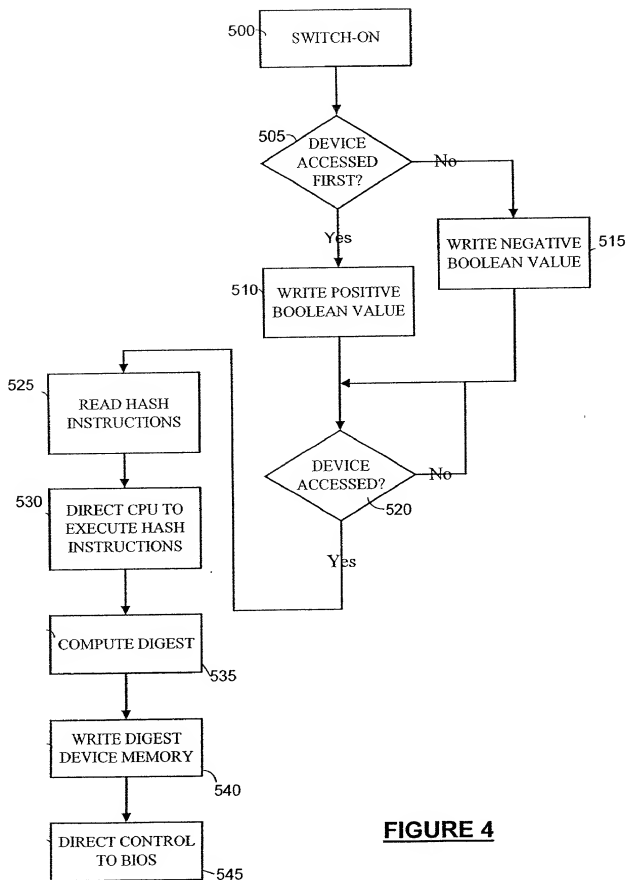

3/9

**FIGURE 4**

4/9

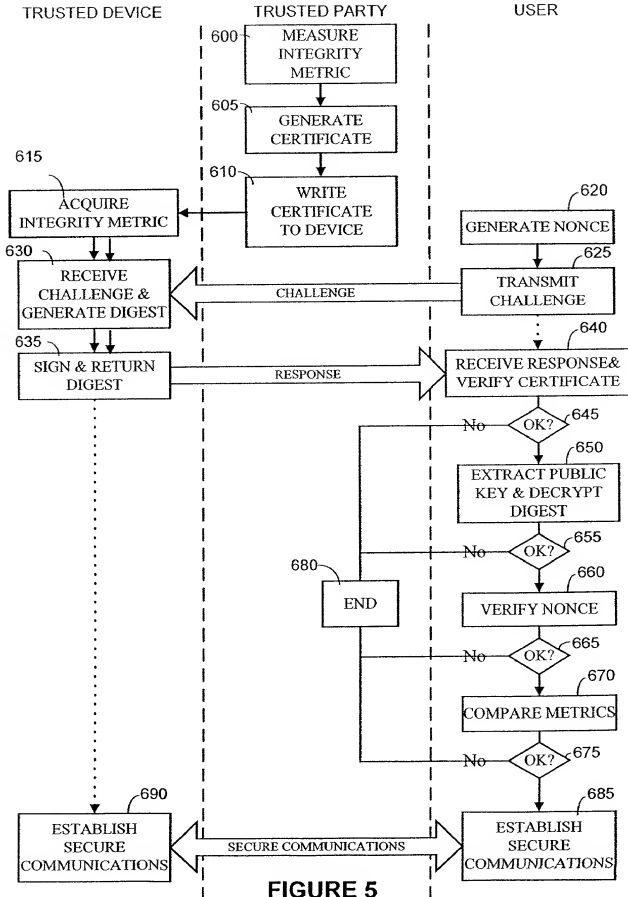


FIGURE 5

5/9

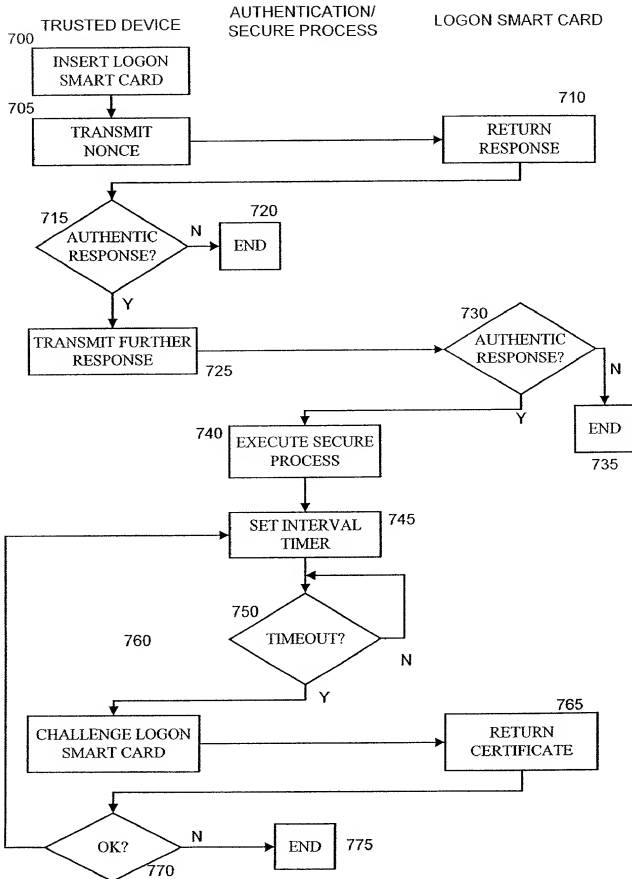
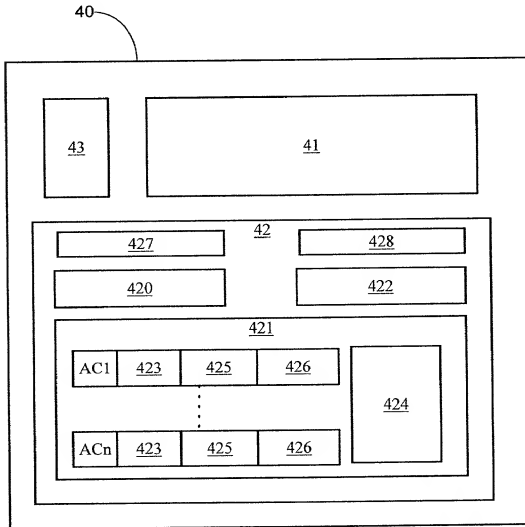
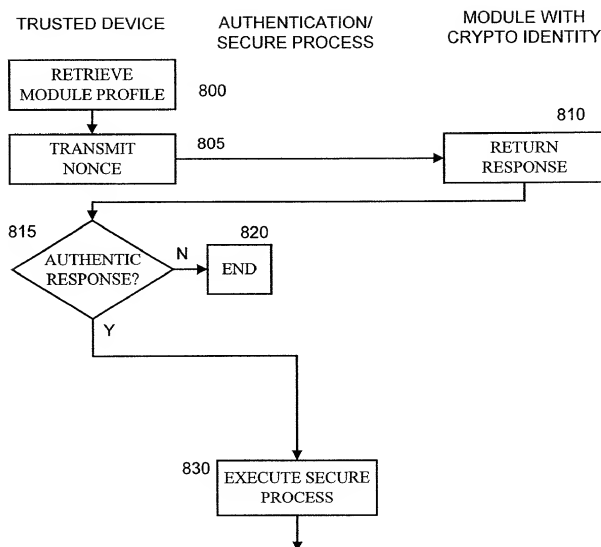


FIGURE 6

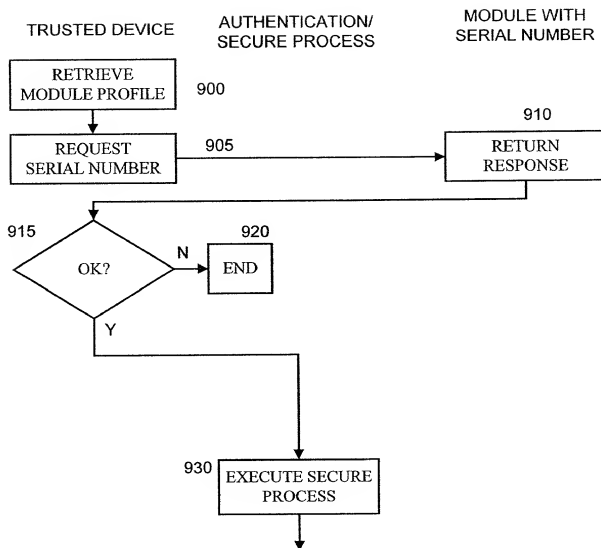
6/9

**FIGURE 7**

7/9

**FIGURE 8**

8/9


**FIGURE 9**

9/9

TRUSTED DEVICE

AUTHENTICATION/
SECURE PROCESSMODULE WITHOUT
IDENTITY/
MCA SMART CARD

1005

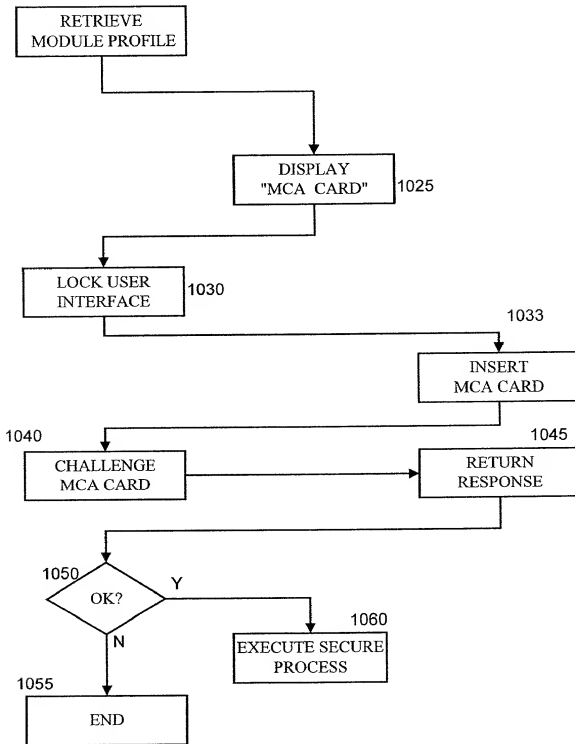**FIGURE 10**

EL652176579US

COMBINED DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY ATTORNEY'S DOCKET No. 30860005 US
(Includes Reference to PCT International Applications)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Protection of the Configuration of Modules in Computing Apparatus

the specification of which was filed as PCT international application

PCT/GB00/00495

on 15 February 2000

and was amended under PCT Article 19

on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, '1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, '119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (if PCT indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
EP	99301100.6	15 February 1999	X Yes __ No
GB	9922663.1	25 September 1999	X Yes __ No

I hereby claim the benefit under Title 35, United States Code, '120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, '112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, '1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

09913454, 081100

COMBINED DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY (Continued)
(Includes Reference to PCT International Applications)

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

[illegible]

PCT APPLICATIONS DESIGNATING THE U.S.		
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)
85/000001	1985-01-01	85-000001
85/000002	1985-01-01	85-000002
85/000003	1985-01-01	85-000003
85/000004	1985-01-01	85-000004
85/000005	1985-01-01	85-000005
85/000006	1985-01-01	85-000006
85/000007	1985-01-01	85-000007
85/000008	1985-01-01	85-000008
85/000009	1985-01-01	85-000009
85/000010	1985-01-01	85-000010
85/000011	1985-01-01	85-000011
85/000012	1985-01-01	85-000012
85/000013	1985-01-01	85-000013
85/000014	1985-01-01	85-000014
85/000015	1985-01-01	85-000015
85/000016	1985-01-01	85-000016
85/000017	1985-01-01	85-000017
85/000018	1985-01-01	85-000018
85/000019	1985-01-01	85-000019
85/000020	1985-01-01	85-000020
85/000021	1985-01-01	85-000021
85/000022	1985-01-01	85-000022
85/000023	1985-01-01	85-000023
85/000024	1985-01-01	85-000024
85/000025	1985-01-01	85-000025
85/000026	1985-01-01	85-000026
85/000027	1985-01-01	85-000027
85/000028	1985-01-01	85-000028
85/000029	1985-01-01	85-000029
85/000030	1985-01-01	85-000030
85/000031	1985-01-01	85-000031
85/000032	1985-01-01	85-000032
85/000033	1985-01-01	85-000033
85/000034	1985-01-01	85-000034
85/000035	1985-01-01	85-000035
85/000036	1985-01-01	85-000036
85/000037	1985-01-01	85-000037
85/000038	1985-01-01	85-000038
85/000039	1985-01-01	85-000039
85/000040	1985-01-01	85-000040
85/000041	1985-01-01	85-000041
85/000042	1985-01-01	85-000042
85/000043	1985-01-01	85-000043
85/000044	1985-01-01	85-000044
85/000045	1985-01-01	85-000045
85/000046	1985-01-01	85-000046
85/000047	1985-01-01	85-000047
85/000048	1985-01-01	85-000048
85/000049	1985-01-01	85-000049
85/000050	1985-01-01	85-000050
85/000051	1985-01-01	85-000051
85/000052	1985-01-01	85-000052
85/000053	1985-01-01	85-000053
85/000054	1985-01-01	85-000054
85/000055	1985-01-01	85-000055
85/000056	1985-01-01	85-000056
85/000057	1985-01-01	85-000057
85/000058	1985-01-01	85-000058
85/000059	1985-01-01	85-000059
85/000060	1985-01-01	85-000060
85/000061	1985-01-01	85-000061
85/000062	1985-01-01	85-000062
85/000063	1985-01-01	85-000063
85/000064	1985-01-01	85-000064
85/000065	1985-01-01	85-000065
85/000066	1985-01-01	85-000066
85/000067	1985-01-01	85-000067
85/000068	1985-01-01	85-000068
85/000069	1985-01-01	85-000069
85/000070	1985-01-01	85-000070
85/000071	1985-01-01	85-000071
85/000072	1985-01-01	85-000072
85/000073	1985-01-01	85-000073
85/000074	1985-01-01	85-000074
85/000075	1985-01-01	85-000075
85/000076	1985-01-01	

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Richard P. Berg, Reg.No. 28,145

SEND CORRESPONDENCE TO:

IP Administration
C/o Hewlett-Packard Company
3404 East Harmony Road
Mail Stop 35
Fr. Collins, CO 80528-9599
USA

DIRECT TELEPHONE CALLS TO:

Richard P. Berg (323) 934-2300

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: CHEN, Liguang

Inventor's Signature:

Dated: 8/8/2001

Residence:

Bristol, United Kingdom

Citizenship:

GB

Post Office Address: 1 Harvest Close, Bradley Stoke, Bristol BS32 9DO England

Full name of 2nd joint inventor, if any: CHAN, David

Inventor's Signature:

Dated:

Residence:

Monte Sereno, California, USA

Citizenship:

GB

Post Office Address: 16112 Mays Avenue, Monte Sereno, California 95030, USA

EL652176579US

COMBINED DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY ATTORNEYS DOCKET NO. 32860025 US
(Includes Reference to PCT (International Applications))

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Protection of the Configuration of Modules in Computing Apparatus

the specification of which was filed as PCT international application

PCT/GB00/00495

on 15 February 2000

and was amended under PCT Article 19

on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, '1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, '119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (If PCT indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
EP	99301100.6	15 February 1999	X Yes ___ No
GB	9922663.1	25 September 1999	X Yes ___ No

I hereby claim the benefit under Title 35, United States Code, '120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, '112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, '1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

COMBINED DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY (Continued)
 (Includes Reference to PCT International Applications)

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED

PCT APPLICATIONS DESIGNATING THE U.S.

PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBER ASSIGNED (if any)
---------------------	-----------------	---

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Richard P. Berg, Reg. No. 28,145

SEND CORRESPONDENCE TO:

IP Administration
 C/o Hewlett-Packard Company
 3404 East Harmony Road
 Mail Stop 35
 Ft. Collins, CO 80528-9599
 USA

DIRECT TELEPHONE CALLS TO:

Richard P. Berg (323) 934-2300

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: CHEN, Ligu

Inventor's Signature:

Dated:

Residence: Bristol, United Kingdom

Citizenship: GB

Post Office Address: 1 Harvest Close, Bradley Stoke, Bristol BS32 9DQ England

Full name of 2nd joint inventor, if any: CHAN, David

Inventor's Signature:

Dated: 10 Aug 01

Residence: Monte Sereno, California, USA

Citizenship: GB

Post Office Address: 16112 Mays Avenue, Monte Sereno, California 95030, USA

00131541 081440